

POWER SPLITTERS/COMBINERS

50 & 75Ω

2 WAY-0° 2 kHz to 10 GHz



ZESC-2



ZFSC-2



ZMSC-2



ZSC-2

MODEL NO.	FREQ. RANGE MHz f_L - f_U	ISOLATION dB					INSERTION LOSS, dB Above 3dB						PHASE UNBALANCE Degrees			AMPLITUDE UNBALANCE dB			VSWR (:1)		CAPD DATA	CASE STYLE Note B	CONNECTION	PRICE \$ Qty. (1-9)	
		L	M°	U	L	M°	U	L	M°	U	L	M°	U	L	M°	U	S	OUT							
ZESC-2-11	10-2000	19	10	18	13	20	11	0.5	0.9	0.5	1.0	0.6	1.2	1	3	6	0.20	0.30	0.50			V37	cr	71.95	
ZFSC-2-1	5-500	30	25	28	20	25	20	0.2	0.5	0.3	0.6	0.6	0.8	2	4	4	0.15	0.15	0.30			K18	cr	44.95	
ZFSC-2-1-75	0.25-300	20	15	30	25	25	20	0.4	0.75	0.4	0.75	0.4	1.0	2	3	5	0.15	0.20	0.30			K18	cr	45.95	
ZFSC-2-1W-75	5-600	44	26	45	30	31	20	0.22	0.6	0.27	0.7	0.46	0.9	1	2	3	0.20	0.30	0.40			K18	cr	50.95	
ZFSC-2-1W	1-750	30	20	28	20	25	20	0.2	0.5	0.4	0.8	0.8	1.0	2	4	4	0.15	0.15	0.30			K18	cr	48.95	
ZFSC-2-2	10-1000	30	20	25	20	23	18	0.2	0.5	0.5	1.0	0.9	1.2	2	4	4	0.15	0.15	0.30			K18	cr	51.95	
ZFSC-2-9G	3500-9000	L1	U1					L1	U1					L1	U1							FOR	JJJ142	cs	59.95
ZFSC-2-10G	2000-10000	15	9	20	12			0.5	1.5	0.6	1.6			7	12		0.60	0.50				DATA	JJJ142	cs	69.95
ZFSC-2-4	0.2-1000	20	15	25	20	23	18	0.2	0.8	0.5	1.0	0.9	1.2	2	4	4	0.15	0.15	0.30			K18	cr	55.95	
ZFSC-2-5	10-1500	25	15	30	20	25	18	0.25	0.6	0.5	1.0	0.8	1.5	2	3	4	0.15	0.20	0.50			K18	cr	59.95	
ZFSC-2-6*	0.002-60	27	20	30	20	27	20	0.3	0.6	0.3	0.6	0.6	1.0	2	3	4	0.15	0.20	0.30	Performance		K18	cr	49.95	
ZFSC-2-6-75	0.004-60	30	20	35	20	25	20	0.5	0.8	0.4	0.8	0.7	1.0	1	2	3	0.15	0.20	0.30	Data and curves		K18	cr	51.95	
ZFSC-2-11	10-2000	14	10	16	14	20	15	1.2	1.5	1.2	1.5	1.0	2.2	1	2	4	0.20	0.30	0.50			K18	cr	64.95	
ZFSC-2-2500	10-2500	16	11	17	14	17	14	0.5	0.8	0.6	1.4	0.8	1.5	1	4	8	0.20	0.30	0.40			K18	cr	74.95	
ZMSC-2-1	0.1-400	20	15	25	20	25	20	0.2	0.5	0.4	0.75	0.6	1.0	2	3	4	0.15	0.20	0.30			M21	at	49.95	
ZMSC-2-1W	1-650	25	20	35	20	25	20	0.3	0.5	0.5	0.8	0.7	1.0	2	3	4	0.15	0.20	0.30			M21	at	54.95	
ZMSC-2-2*	0.002-60	27	20	30	20	27	20	0.3	0.6	0.3	0.6	0.6	1.0	2	3	4	0.15	0.25	0.30			M21	at	59.95	
ZSC-2-1	0.1-400	20	15	25	20	25	20	0.2	0.5	0.4	0.75	0.6	1.0	2	3	4	0.15	0.20	0.30			M22	at	47.95	
ZSC-2-1W	1-650	25	20	35	25	25	20	0.3	0.5	0.5	0.8	0.7	1.0	2	3	4	0.15	0.20	0.30			M22	at	49.95	
ZSC-2-2*	0.002-60	25	20	30	20	27	20	0.3	0.6	0.3	0.6	0.6	1.0	2	3	4	0.15	0.25	0.30			M22	at	52.95	
ZSC-2-2-75**	0.002-60	25	20	30	20	27	20	0.3	0.6	0.3	0.6	0.6	1.0	2	3	4	0.15	0.25	0.30			M22	at	53.95	
ZSC-2-4	10-1000	25	20	35	20	25	20	0.2	0.5	0.5	0.8	0.7	1.3	2	4	6	0.15	0.20	0.30			M22	at	52.95	
ZSC-2375	55-85			35	25						0.3	0.5				1		0.10				M22	at	52.95	
ZSC-2-1-75	0.25-300	20	15	30	20	20	15	0.4	0.75	0.4	0.75	0.4	1.0	2	3	5	0.15	0.20	0.30			M22	at	49.95	

NOTES:

- * Isolation specified to 0.004 MHz
- ** Insertion loss and Isolation specified to -20°C from 0.002 MHz to 0.004 MHz
- ⊕ When only specification for M range given, specification applies to entire frequency range.
- ⊕ At low range frequency band (fL to 10 fL), linearly derate maximum input power by 13 dB.
- Denotes 75 Ohm model, for coax connector models 75 Ohm BNC connectors are standard.
- △ Available only with SMA connectors
- A. General Quality Control Procedures, Environmental Specifications, Hi-Rel and MIL description are given in section 0, see "Mini-Circuits Guarantees Quality" article.
- B. Connector types and case mounted options, case finishes are given in section 0, see "Case styles & Outline Drawings".
- C. Prices and specifications subject to change without notice.
- 1. Absolute maximum power, voltage and current ratings:
 - 1a. Matched power rating, models ZAPD, ZN2PD, ZC2PD 10 Watt ZAPD-900-5W, ZN2PD-20, 5W (as a splitter), other models 1 Watt
 - 1b. Internal load dissipation 0.125 Watt; ZAPD-900-5W, 1W max.; ZN2PD-20, 0.725W max.; ZN2PD-9G, ZAPD-2-22-75, 0.25W max.

coaxial connections

see case style outline drawing for pin locations

PORT	cr	cs	ct
SUM PORT	3	5	2
PORT 1	1	1	1
PORT 2	2	2	3
GND EXT.	—	—	—
CASE GND	—	—	—
NOT USED	—	—	—




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-835094 • Fax 44-1252-837010

INTERNET <http://www.minicircuits.com>

ISO 9001 CERTIFIED

991222

Coaxial

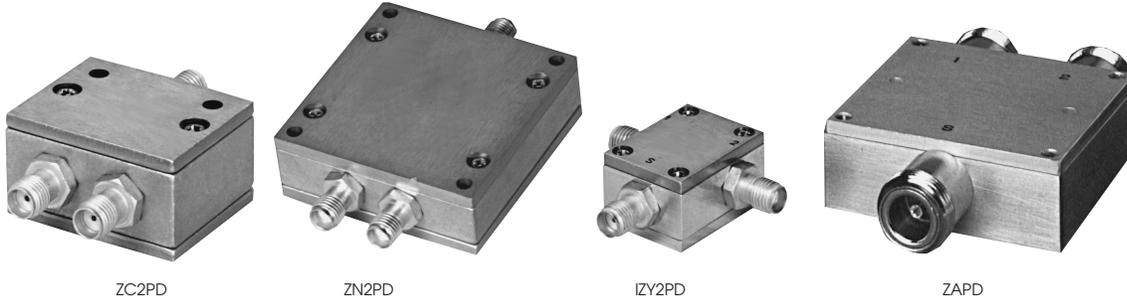

MODEL NO.	FREQ. RANGE MHz $f_L - f_U$	ISOLATION dB			INSERTION LOSS, dB Above 3dB			PHASE UNBALANCE Degrees			AMPLITUDE UNBALANCE dB			VSWR (:1)		CAPD DATA	CASE STYLE	CONNECTION	PRICE \$		
		L	M ^o	U	L	M ^o	U	L	M ^o	U	L	M ^o	U	S	OUT					Note B	Qty. (1-9)
ZC2PD-900	800-900	L ^o	30	20		0.1	0.4		2		0.20	1.10	1.30	1.10	1.30		F183	cs	64.95		
ZN2PD-20	750-2000	18	15	25	20	18	15		0.2	0.5		4		0.30	1.16	1.5	1.10	1.35	VVV180	cs	67.95
ZN2PD-920	800-920		30	20		0.15	0.4		2		0.20	1.10	1.20	1.04	1.20		VVV180	cs	59.95		
ZN2PD-920W	700-1050		22	15		0.15	0.5		3		0.30	1.20	1.50	1.04	1.20		VVV180	cs	54.95		
ZN2PD-1900	1600-1900		30	20		0.18	0.4		2		0.20	1.20	1.35	1.04	1.20	FOR DATA	VVV180	cs	69.95		
ZN2PD-1900W	1500-2000		24	15		0.2	0.5		3		0.30	1.20	1.50	1.04	1.20		VVV180	cs	64.95		
ZN2PD-9G	1700-9000 GHz		22	15		0.5	1.4		4		0.60						VVV180	cs	69.95		
IZY2PD-64	5.8-6.4		35	24		0.2	0.5		5		0.30	1.05	1.30	1.20	1.35	SEE	JJJ245	cs	89.95		
IZY2PD-86	7.0-8.6		30	18		0.1	0.5		6		0.25	1.10	1.45	1.10	1.40		JJJ245	cs	94.95		
ZAPD-1	0.5-1.0		25	19		0.25	0.6		2		0.20					YONI	F14	cs	54.95		
ZAPD-2	1.0-2.0		25	19		0.25	0.6		2		0.20						F14	cs	54.95		
ZAPD-2-22-75	0.91-2.15		30	20		0.2	0.7		2		0.40	1.15	1.60	1.10	1.30	OUR	F14	cs	58.95		
ZAPD-20	0.7-2.0		30	20		0.30	0.7		3		0.40	1.15	1.35	1.10	1.30		F53	cs	59.95		
ZAPD-21	0.5-2.0		25	18		0.25	1.0		3		0.20						F53	cs	59.95		
ZAPD-4	2.0-4.2		25	19		0.4	0.8		6		0.40					WEBSITE	F14	cs	59.95		
ZAPD-50	4.4-5.0		26	20		0.3	0.8		5		0.50						F14	cs	54.95		
ZAPD-50W	4.2-6.0		26	16		0.3	0.8		5		0.70						F14	cs	64.95		
ZAPD-900-5W	0.1-0.9		23	18		0.3	1.0		3		0.30	1.15	1.50	1.22	1.50		F14	cs	59.95		
ZAPD-1750	0.95-1.75		30	22		0.2	0.4		4		0.50	1.15	1.50	1.22	1.50		F14	cs	54.95		
see Performance Data and curves																					

L = low range (f_L to $10 f_L$)
 L1 = f_L to 6 GHz
 L^o = 750 to 875 MHz

M = mid range ($10 f_L$ to $f_U/2$)
 M1 = 6 GHz to f_U
 M^o = 1850 to 2000 MHz

U = upper range ($f_U/2$ to f_U)

NSN GUIDE

MCL NO.	NSN	MCL NO.	NSN	MCL NO.	NSN
ZAPD-1(TNC)	5985-01-250-4883	ZFSC-2-2(SMA)	6625-01-333-1127	ZSC-2-1(TNC)	6625-01-310-2129
ZAPD-2(SMA)	5895-01-229-7431	ZFSC-2-2B	5895-01-330-4416	ZSC-2-1	5895-01-214-6032
ZAPD-4	6625-01-173-1887	ZFSC-2-4(TNC)	5985-01-250-4882	ZSC-2-1B	6625-01-018-1066
ZAPD-4(SMA)	5985-01-383-0636	ZFSC-2-5	6625-01-253-2444	ZSC-2-1B(TNC)	6625-01-109-3706
ZESC-2-11	5985-01-381-9081	ZFSC-2-6	6625-01-419-4241	ZSC-2-1(BNC)	5895-01-036-6254
ZFSC-2-1	6625-01-139-3499	ZFSC-2-6(BNC)	5895-01-408-6857	ZSC-2-1B(BNC)	6625-00-270-3055
ZFSC-2-1(SMA)	6625-01-213-6490	ZFSC-2-6B	5985-01-315-2869	ZSC-2-1W	5895-01-283-0850
ZFSC-2-1(BNC)	5985-01-176-4551	ZFSC-2-11(SMA)	6625-01-415-2183	ZSC-2-1WB	6625-01-264-8985
ZFSC-2-1-75	5895-01-325-4795	ZMSC-2-1	5985-01-333-1128	ZSC-2-1-75B	5895-01-136-8182
ZFSC-2-1W(SMA)	6625-01-200-5094	ZMSC-2-1B	5895-01-253-2445	ZSC-2-2B	5820-01-136-7245
ZFSC-2-1W	5895-01-348-3534	ZMSC-2-1BR	5985-01-338-9329	ZSC-2-2-75B	5915-01-012-8162
ZFSC-2-2B(SMA)	6625-01-362-1801	ZMSC-2-1W	5895-01-127-0232	ZSC-2375	5895-01-229-0157



The Design Engineers Search Engine
 Provides Actual Data Instantly
 At: <http://www.minicircuits.com>

In Stock... Immediate Delivery
 For Custom Versions Of Standard Models
 Consult Our Applications Dept.

